
## **Network Topology**

## **Network Topology**

\*\*Terminals / KVDs / Handhelds will need to be connected on the POS network to communicate\*\*

\*\*All networking printers need to have STATIC IP addresses.

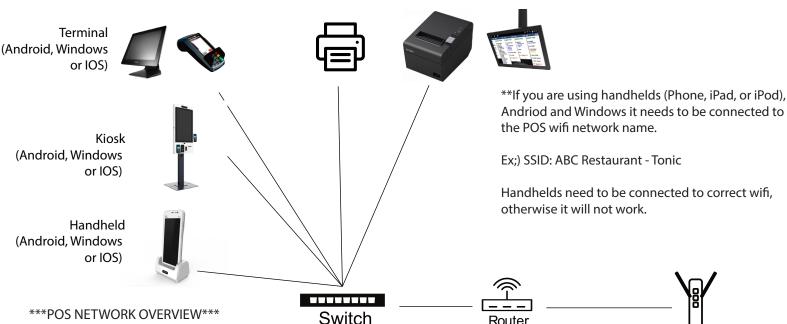

The restaurant needs to follow this diagram in order to have a well maintained POS network. Cabling needs to completed in order to connect all networking devices to the switch/internet. The following diagram gives an idea of what is recommended to complete the installation of your terminals. printers and networking

\*\*A switch is required ONLY if you need to connect more than 1 device, depending on the ports available from the router.

Router/Wireless Router

Make sure hat LAN IP address on the router does not conflict with modem.\*\*

\*\*This device could also be a DSL modem depending on your Internet Service Provider. Make sure hat LAN IP address on the modem does not conflict with internal router.\*\*

